


環保物料專用  
RoHS compliant

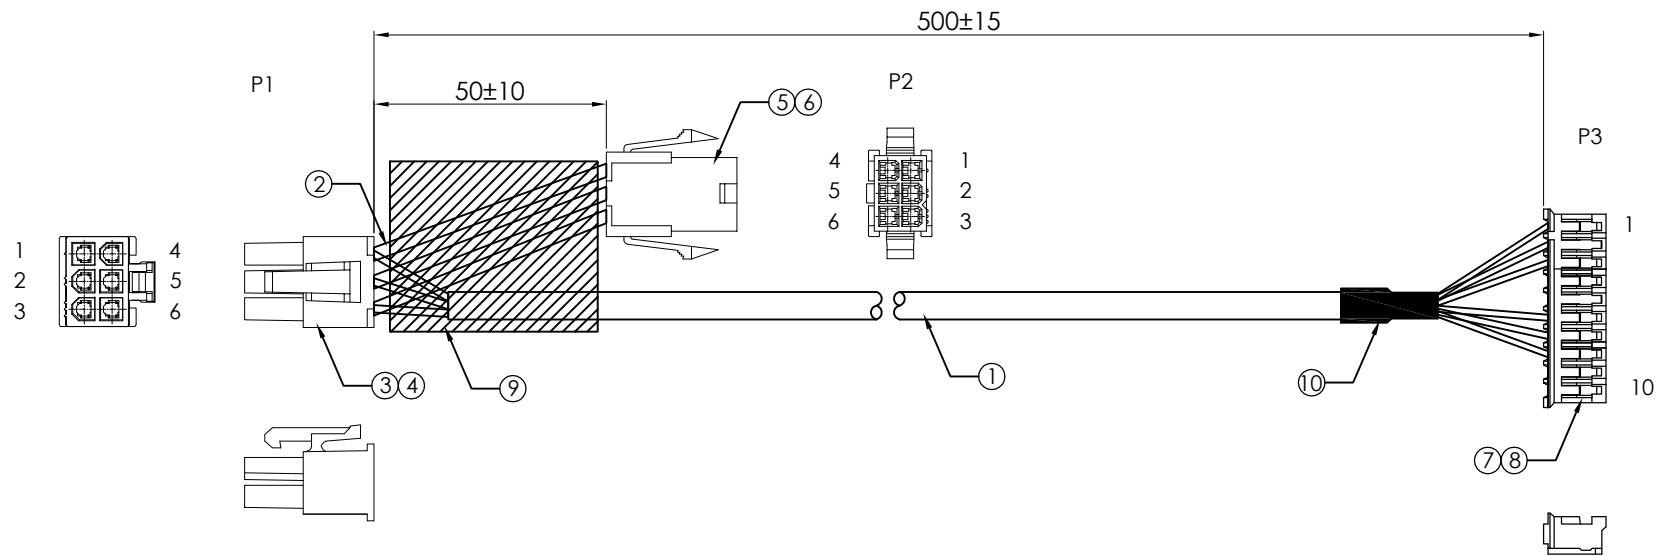

Bill Of Material

10	KWQS097	TUBE.	Heat-shrinkable tube 600V Black Ø6.0mm*30mm	mm	30
9	KWQS097	TUBE.	Heat-shrinkable tube 600V Black Ø8.0mm*30mm	mm	30
8	KWQS206	TER.	PH2.0 Phosphor Bronze, Tin Plating	PCS	5
7	KWQS206	CONN.	2.0 mm PH Housing 10P	PCS	1
6	CXQS116	CONN.	C4255HM-2x03P : 4.2 MICRO FIT FEMALE 2*03P VERT DUAL	PCS	1
5	CXQS116	TER.	C4255M-TBE-H:CONN TERM MALE 16-20AWG TIN	PCS	5
4	CXQS116	CONN.	C4255HF-2x03P : 4.2 MICRO FIT MALE 2*03P VERT DUAL	PCS	1
3	CXQS116	TER.	C4255F-TB-H:CONN TERM FEMALE 14-18AWG TIN	PCS	5
2	KWQS225	WIRE	UL1007 22AWG Ø1.6mm	mm	
1	KWQS225	WIRE	UL2464 24(7/0.2TS)/6C+DW+AL/MY+JACKET OD5.0mm Jacket Color: Black	PCS	1
No.	Vendor	NAME	Material Name and Name	Unit	Qty

CONN P1	CONN P2	COLOR	CONN P3 COLOR
1	1	Green 绿	1 Green 绿 24AWG
2	2	Blue 蓝	3 Yellow 黄 24AWG
3	3	NC	NC
4	4	Black 黑	7 Black 黑 24AWG
			8 Orange 橙 24AWG
5	5	White 白	6 White 白 24AWG
6	6	Red 红	2 Red 红 24AWG

<b>MG CONNECTORS</b>	DESCRIPTION(内容): 4.2 MICRO Wire Harness		DRAWN(製圖): <b>Tom Liu</b>		GENERAL TOLERANCE		REV: A/2	REV	DESCRIPTION	DATE
			CHECKED(確認): <b>Jack Wu</b>		LINEAR	ANGLES	UNIT:	1	ORIGINAL	Sep-08-2021
			APPROVAL(核准): <b>Kane He</b>		X.: ±0.30	X°: ±5.0°	mm	2		
			PART NO: (料號) CBH-C4201HF-06-500A		X.X: ±0.20	X.X°: ±3.0°		3		
		DWG NO(圖號): KWRD210908-015		X.XX: ±0.15	X.XX°: ±2.0°		SHEET:	4		
				X.XXX: ±0.10	X.XXX°: ±1.0°		1/1			

A4 SCALE(比例): 1:XX  
THIRD ANGLE PROJECTION